


## Chapter 10:

### Characters, C-Strings, and More About the string Class

Addison-Wesley  
is an imprint of

PEARSON

Copyright © 2012 Pearson Education, Inc.

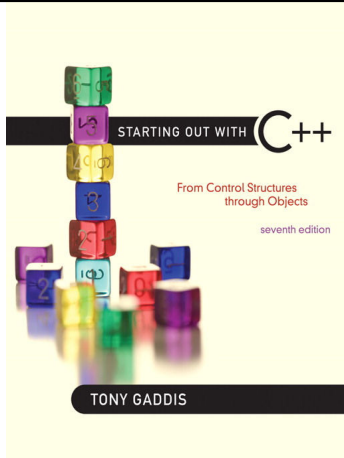

TONY GADDIS

---

---

---

---

---

---


---

---

## 10.1

### Character Testing

Copyright © 2012 Pearson Education, Inc.



TONY GADDIS

---

---

---

---

---

---

---

---

## Character Testing

- require `cctype` header file

FUNCTION	MEANING
<code>isalpha</code>	true if <code>arg</code> . is a letter, false otherwise
<code>isalnum</code>	true if <code>arg</code> . is a letter or digit, false otherwise
<code>isdigit</code>	true if <code>arg</code> . is a digit 0-9, false otherwise
<code>islower</code>	true if <code>arg</code> . is lowercase letter, false otherwise
<code>isprint</code>	true if <code>arg</code> . is a printable character, false otherwise
<code>ispunct</code>	true if <code>arg</code> . is a punctuation character, false otherwise
<code>isupper</code>	true if <code>arg</code> . is an uppercase letter, false otherwise
<code>isspace</code>	true if <code>arg</code> . is a whitespace character, false otherwise

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## From Program 10-1

```
10 cout << "Enter any character: ";
11 cin.get(input);
12 cout << "The character you entered is: " << input << endl;
13 if (isalpha(input))
14     cout << "That's an alphabetic character.\n";
15 if (isdigit(input))
16     cout << "That's a numeric digit.\n";
17 if (islower(input))
18     cout << "The letter you entered is lowercase.\n";
19 if (isupper(input))
20     cout << "The letter you entered is uppercase.\n";
21 if (isspace(input))
22     cout << "That's a whitespace character.\n";
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---


---

---

---

---

## 10.2



### Character Case Conversion

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## Character Case Conversion

- Require `cctype` header file
- Functions:

```
toupper: if char argument is lowercase letter, return
uppercase equivalent; otherwise, return input
unchanged
char ch1 = 'H';
char ch2 = 'e';
char ch3 = '!';
cout << toupper(ch1); // displays 'H'
cout << toupper(ch2); // displays 'E'
cout << toupper(ch3); // displays '!'
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## Character Case Conversion

- Functions:

`tolower`: if char argument is uppercase letter, return lowercase equivalent; otherwise, return input unchanged

```
char ch1 = 'H';
```

```
char ch2 = 'e';
```

```
char ch3 = '!';
```

```
cout << tolower(ch1); // displays 'h'
```

```
cout << tolower(ch2); // displays 'e'
```

```
cout << tolower(ch3); // displays '!'
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---


---

---

---

## 10.3

### C-Strings



Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## C-Strings

- C-string: sequence of characters stored in adjacent memory locations and terminated by `NULL` character
- String literal (string constant): sequence of characters enclosed in double quotes " " :  
"Hi there!"

H	i		t	h	e	r	e	!	\0
---	---	--	---	---	---	---	---	---	----

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## C-Strings

- Array of `chars` can be used to define storage for string:  

```
const int SIZE = 20;  
char city[SIZE];
```
- Leave room for `NULL` at end
- Can enter a value using `cin` or `>>`
  - Input is whitespace-terminated
  - No check to see if enough space
- For input containing whitespace, and to control amount of input, use `cin.getline()`

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

### Program 10-5

```
1 // This program displays a string stored in a char array.  
2 #include <iostream>  
3 using namespace std;  
4  
5 int main()  
6 {  
7     const int SIZE = 80; // Array size  
8     char line[SIZE];      // To hold a line of input  
9     int count = 0;        // Loop counter variable  
10  
11     // Get a line of input.  
12     cout << "Enter a sentence of no more than "  
13     << (SIZE - 1) << " characters:\n";  
14     cin.getline(line, SIZE);  
15  
16     // Display the input one character at a time.  
17     cout << "The sentence you entered is:\n";  
18     while (line[count] != '\0')  
19     {  
20         cout << line[count];  
21         count++;  
22     }  
23     return 0;  
24 }
```

**Program Output with Example Input Shown in Bold**  
Enter a sentence of no more than 79 characters:  
**C++ is challenging but fun! [Enter]**  
The sentence you entered is:  
C++ is challenging but fun!

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---


---

---

---

## 10.4

### Library Functions for Working with C-Strings



Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## Library Functions for Working with C-Strings

- Require the `cstring` header file
- Functions take one or more C-strings as arguments. Can use:
  - C-string name
  - pointer to C-string
  - literal string

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## Library Functions for Working with C-Strings

### Functions:

- `strlen(str)`: returns length of C-string `str`

```
char city[SIZE] = "Missoula";
cout << strlen(city); // prints 8
```
- `strcat(str1, str2)`: appends `str2` to the end of `str1`

```
char location[SIZE] = "Missoula, ";
char state[3] = "MT";
strcat(location, state);
// location now has "Missoula, MT"
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## Library Functions for Working with C-Strings

### Functions:

- `strcpy(str1, str2)`: copies `str2` to `str1`

```
const int SIZE = 20;
char fname[SIZE] = "Maureen", name[SIZE];
strcpy(name, fname);
```

**Note:** `strcat` and `strcpy` perform no bounds checking to determine if there is enough space in receiving character array to hold the string it is being assigned.

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## C-string Inside a C-string

Function:

- `strstr(str1, str2)`: finds the first occurrence of `str2` in `str1`. Returns a pointer to match, or `NULL` if no match.

```
char river[] = "Wabash";  
char word[] = "aba";  
cout << strstr(state, word);  
// displays "abash"
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---


---

---

---

## 10.5

### C-String/Numeric Conversion Functions



Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## String/Numeric Conversion Functions

- require `cstdlib` header file

FUNCTION	PARAMETER	ACTION
<code>atoi</code>	C-string	converts C-string to an <code>int</code> value, returns the value
<code>atol</code>	C-string	converts C-string to a <code>long</code> value, returns the value
<code>atof</code>	C-string	converts C-string to a <code>double</code> value, returns the value
<code>itoa</code>	<code>int</code> , C-string, <code>int</code>	converts 1 <sup>st</sup> <code>int</code> parameter to a C-string, stores it in 2 <sup>nd</sup> parameter. 3 <sup>rd</sup> parameter is base of converted value

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## String/Numeric Conversion Functions

```
int iNum;  
long lNum;  
double dNum;  
char intChar[10];  
iNum = atoi("1234"); // puts 1234 in iNum  
lNum = atol("5678"); // puts 5678 in lNum  
dNum = atof("35.7"); // puts 35.7 in dNum  
itoa(iNum, intChar, 8); // puts the string  
// "2322" (base 8 for 123410) in intChar
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## String/Numeric Conversion Functions - Notes

- if C-string contains non-digits, results are undefined
  - function may return result up to non-digit
  - function may return 0
- `itoa` does no bounds checking – make sure there is enough space to store the result

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## 10.6

### Writing Your Own C-String Handling Functions

---

---

---


---

---

---

---

# 10.6



## Writing Your Own C-String Handling Functions

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## Writing Your Own C-String Handling Functions

- Designing C-String Handling Functions
  - can pass arrays or pointers to `char` arrays
  - Can perform bounds checking to ensure enough space for results
  - Can anticipate unexpected user input

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## From Program 10-9

```
31 void stringCopy(char string1[], char string2[])
32 {
33     int index = 0; // Loop counter
34
35     // Step through string1, copying each element to
36     // string2. Stop when the null character is encountered.
37     while (string1[index] != '\0')
38     {
39         string2[index] = string1[index];
40         index++;
41     }
42
43     // Place a null character in string2.
44     string2[index] = '\0';
45 }
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---



## From Program 10-10

```
29 void nameSlice(char userName[])
30 {
31     int count = 0; // Loop counter
32
33     // Locate the first space, or the null terminator if there
34     // are no spaces.
35     while (userName[count] != ' ' && userName[count] != '\0')
36         count++;
37
38     // If a space was found, replace it with a null terminator.
39     if (userName[count] == ' ')
40         userName[count] = '\0';
41 }
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---


---

---

---

## 10.7

### More About the C++ string Class



Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## The C++ string Class

- Special data type supports working with strings
- `#include <string>`
- Can define string variables in programs:  
`string firstName, lastName;`
- Can receive values with assignment operator:  
`firstName = "George";`  
`lastName = "Washington";`
- Can be displayed via `cout`  
`cout << firstName << " " << lastName;`

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

#### Program 10-15

```
1 // This program demonstrates the string class.
2 #include <iostream>
3 #include <string> // Required for the string class.
4 using namespace std;
5
6 int main()
7 {
8     string movieTitle;
9
10    movieTitle = "Wheels of Fury";
11    cout << "My favorite movie is " << movieTitle << endl;
12    return 0;
13 }
```

#### Program Output

My favorite movie is Wheels of Fury

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## Input into a string Object

- Use `cin >>` to read an item into a string:

```
string firstName;
cout << "Enter your first name: ";
cin >> firstName;
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

#### Program 10-16

```
1 // This program demonstrates how cin can read a string into
2 // a string class object.
3 #include <iostream>
4 #include <string>
5 using namespace std;
6
7 int main()
8 {
9     string name;
10
11    cout << "What is your name? ";
12    cin >> name;
13    cout << "Good morning " << name << endl;
14    return 0;
15 }
```

#### Program Output with Example Input Shown in Bold

What is your name? **Peggy [Enter]**  
Good morning Peggy

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## Input into a string Object

- Use `getline` function to put a line of input, possibly including spaces, into a string:

```
string address;
cout << "Enter your address: ";
getline(cin, address);
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## string Comparison

- Can use relational operators directly to compare string objects:

```
string str1 = "George",
        str2 = "Georgia";
if (str1 < str2)
    cout << str1 << " is less than "
          << str2;
```

- Comparison is performed similar to `strcmp` function. Result is `true` or `false`

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

### Program 10-18

```
1 // This program uses relational operators to alphabetically
2 // sort two strings entered by the user.
3 #include <iostream>
4 #include <string>
5 using namespace std;
6
7 int main ()
8 {
9     string name1, name2;
10
11     // Get a name.
12     cout << "Enter a name (last name first): ";
13     getline(cin, name1);
14
15     // Get another name.
16     cout << "Enter another name: ";
17     getline(cin, name2);
18
19     // Display them in alphabetical order.
20     cout << "Here are the names sorted alphabetically:\n";
21     if (name1 < name2)
22         cout << name1 << endl << name2 << endl;
23     else if (name1 > name2)
24         cout << name2 << endl << name1 << endl;
25     else
26         cout << "You entered the same name twice!\n";
27     return 0;
28 }
```

Program Output with Example Input Shown in Bold  
Enter a name (last name first): **Smith, Richard** [Enter]  
Enter another name: **Jones, John** [Enter]  
Here are the names sorted alphabetically:  
**Jones, John**  
**Smith, Richard**

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

## Other Definitions of C++ strings

Definition	Meaning
<code>string name;</code>	defines an empty string object
<code>string myname("Chris");</code>	defines a string and initializes it
<code>string yourname(myname);</code>	defines a string and initializes it
<code>string aname(myname, 3);</code>	defines a string and initializes it with first 3 characters of <code>myname</code>
<code>string verb(myname, 3, 2);</code>	defines a string and initializes it with 2 characters from <code>myname</code> starting at position 3
<code>string noname('A', 5);</code>	defines string and initializes it to 5 'A's

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## string Operators

OPERATOR	MEANING
<code>&gt;&gt;</code>	extracts characters from stream up to whitespace, insert into string
<code>&lt;&lt;</code>	inserts string into stream
<code>=</code>	assigns string on right to string object on left
<code>+=</code>	appends string on right to end of contents on left
<code>+</code>	concatenates two strings
<code>[]</code>	references character in string using array notation
<code>&gt;, &gt;=, &lt;, &lt;=, ==, !=</code>	relational operators for string comparison. Return <code>true</code> or <code>false</code>

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## string Operators

```
string word1, phrase;
string word2 = " Dog";
cin >> word1; // user enters "Hot Tamale"
              // word1 has "Hot"
phrase = word1 + word2; // phrase has
                       // "Hot Dog"
phrase += " on a bun";
for (int i = 0; i < 16; i++)
    cout << phrase[i]; // displays
                       // "Hot Dog on a bun"
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

#### Program 10-20

```
1 // This program demonstrates the C++ string class.
2 #include <iostream>
3 #include <string>
4 using namespace std;
5
6 int main ()
7 {
8     // Define three string objects.
9     string str1, str2, str3;
10
11     // Assign values to all three.
12     str1 = "ABC";
13     str2 = "DEF";
14     str3 = str1 + str2;
15
16     // Display all three.
17     cout << str1 << endl;
18     cout << str2 << endl;
19     cout << str3 << endl;
20
21     // Concatenate a string onto str3 and display it.
22     str3 += "GHI";
23     cout << str3 << endl;
24     return 0;
25 }
```

#### Program Output

```
ABC
DEF
ABCDEF
ABCDEFGHI
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## string Member Functions

- Are behind many overloaded operators
- Categories:
  - **assignment**: assign, copy, data
  - **modification**: append, clear, erase, insert, replace, swap
  - **space management**: capacity, empty, length, resize, size
  - **substrings**: find, substr
  - **comparison**: compare
- See Table 10-7 for a list of functions

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

## string Member Functions

```
string word1, word2, phrase;
cin >> word1;           // word1 is "Hot"
word2.assign(" Dog");
phrase.append(word1);
phrase.append(word2);    // phrase has "Hot Dog"
phrase.append(" with mustard relish", 13);
// phrase has "Hot Dog with mustard"
phrase.insert(8, "on a bun ");
cout << phrase << endl; // displays
// "Hot Dog on a bun with mustard"
```

Copyright © 2012 Pearson Education, Inc.

---

---

---

---

---

---

---

---

#### Program 10-21

```
1 // This program demonstrates a string
2 // object's length member function.
3 #include <iostream>
4 #include <string>
5 using namespace std;
6
7 int main ()
8 {
9     string town;
10
11     cout << "Where do you live? ";
12     cin >> town;
13     cout << "Your town's name has " << town.length() ;
14     cout << " characters\n";
15     return 0;
16 }
```

#### Program Output with Example Input Shown in Bold

Where do you live? **Jacksonville** [Enter]  
Your town's name has 12 characters

---

---

---

---

---

---

---

---